

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
5 December 2002 (05.12.2002)

PCT

(10) International Publication Number  
**WO 02/098064 A1**

(51) International Patent Classification<sup>7</sup>: **H04L 12/28**

(21) International Application Number: PCT/US02/16288

(22) International Filing Date: 22 May 2002 (22.05.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
09/872,125 31 May 2001 (31.05.2001) US

(71) Applicant (for all designated States except US): **TURIN NETWORKS** [US/US]; 1415 North McDowell Boulevard, Petaluma, CA 94954 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WEST, Steve** [ZA/US]; 64 Century Lane, Petaluma, CA 94952 (US). **BRANDIS, Dirk** [US/US]; 15 San Gregorio Court, Novato, CA 94947 (US). **SMITH, Russ** [US/US]; 1245

Beattie Lane, Sebastopol, CA 95472 (US). **MARRONE, Frank** [US/US]; 105 Oakbrook Lane, Cloverdale, CA 95425 (US).


(74) Agents: **MALLIE, Michael, J.** et al.; Blakey, Sokoloff, Taylor & Zafman, LLP, 12400 Wilshire Boulevard, 7th Floor, Los Angeles, CA 90025 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DISTRIBUTED CONTROL OF DATA FLOW IN A NETWORK SWITCH

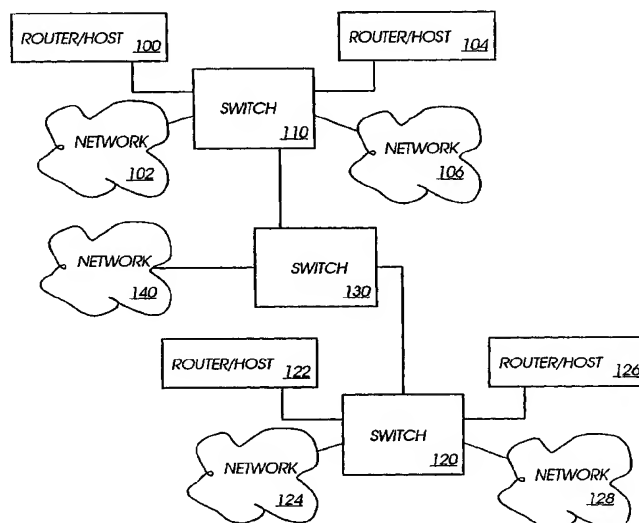

(57) Abstract: The network switch (110) described herein provides a cell/packet switching architecture (Fig. 1) that switches between line interface cards across a meshed backplane. In one embodiment, the switching can be accomplished at, or near, line speed in a protocol independent manner. The protocol independent switching provides support for various applications including Asynchronous Transfer Mode (ATM) switching Internet Protocol (IP) switching. Multiprotocol Label Switching (MPLS) switching, Ethernet switching and frame relay switching. The architecture allows the network switch (110) to provision service on a per port basis. In one embodiment, the network switch (110) provides a non-blocking topology with both input and output queuing and per flow queuing at both ingress and egress. Per flow flow-control can be provided between ingress and egress scheduling. Strict priority, round robin, weighted round robin and earliest deadline first scheduling can be provided.



WO 02/098064 A1



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

DISTRIBUTED CONTROL OF DATA FLOW  
IN A NETWORK SWITCH

FIELD OF THE INVENTION

The invention relates to network switches. More specifically, the invention relates to distributed control of data flow in network switches.

BACKGROUND OF THE INVENTION

In high bandwidth networks such as fiber optic networks, lower bandwidth services such as voice communications are aggregated and carried over a single fiber optic link. However, because the aggregated data can have different destinations some mechanism for switching the aggregated components is required. Switching can be performed at different levels of aggregation.

Current switching is accomplished in a synchronous manner. Signals are routed to a cross-connect or similar switching device that switch and route signals at some predetermined granularity level, for example, byte by byte. Synchronous switching in a cross-connect is a logically straight forward method for switching. However, because data flow between network nodes is not necessarily consistent, switching bandwidth may not be used optimally in a synchronous cross-connect. One source of data may use all available bandwidth while a second source of data may transmit data sporadically.

In order to support data sources that transmit at or near peak bandwidth, cross-connects are designed to provide the peak bandwidth to all data sources because specific data rates of specific data sources are not known when the cross-connect is designed. As a result, all data paths through the cross-connect provide the peak bandwidth, which may not be consumed by some or even most of the data sources.

A further disadvantage of synchronous switching architectures is that centralized switching control and interconnections grow exponentially as the

input/output paths grow. Therefore, large switching architectures are complex and require complex control algorithms and techniques.

#### SUMMARY OF THE INVENTION

A network switch is described. The network switch includes ingress cards to receive data from sources external to the switch and egress cards to transmit data to devices external to the switch. The ingress cards have an ingress buffer to temporarily store data, an ingress scheduler coupled to the ingress buffer, and a set of ports coupled to the ingress scheduler. The ingress scheduler reads data from the ingress buffer and selectively transfers the data to one of the set of ports. The egress cards have a set of ports coupled to receive data from respective ingress card ports. The egress cards also have an egress buffer coupled to the set of egress card ports. The egress buffer selectively reads data from the ports and stores the data. An egress scheduler is coupled to the egress buffer. The egress scheduler reads data from the egress buffer and transmits data to the external devices.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The invention is illustrated by way of example, and not by way of limitation, in the figures of the accompanying drawings in which like reference numerals refer to similar elements.

**Figure 1** illustrates one embodiment of a network architecture having multiple network switches.

**Figure 2** illustrates one embodiment of an interconnection of cards within a network switch.

**Figure 3** conceptually illustrates one embodiment of an ingress scheduler.

**Figure 4** conceptually illustrates one embodiment of a egress cache scheduling of egress card ports.

#### DETAILED DESCRIPTION

Techniques for distributed control of data flow in a network switch are described. In the following description, for purposes of explanation, numerous specific

details are set forth in order to provide a thorough understanding of the invention. It will be apparent, however, to one skilled in the art that the invention can be practiced without these specific details. In other instances, structures and devices are shown in block diagram form in order to avoid obscuring the invention.

Reference in the specification to “one embodiment” or “an embodiment” means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the invention. The appearances of the phrase “in one embodiment” in various places in the specification are not necessarily all referring to the same embodiment.

The network switch described herein provides a cell/packet switching architecture that switches between line interface cards across a meshed backplane. In one embodiment, the switching can be accomplished at, or near, line speed in a protocol independent manner. The protocol independent switching provides support for various applications including, but not limited to, Asynchronous Transfer Mode (ATM) switching, Internet Protocol (IP) switching, Multiprotocol Label Switching (MPLS) switching, Ethernet switching and frame relay switching. The architecture allows the network switch to provision service on a per port basis.

In one embodiment, the network switch provides a non-blocking topology with both input and output queuing and per flow queuing at both ingress and egress. Per flow flow-control can be provided between egress and ingress scheduling. Strict priority, round robin, weighted round robin and earliest deadline first scheduling can be provided. In one embodiment, cell/packet discard is provided only at the ingress side of the switch. In one embodiment, early packet discard (EPD), partial packet discard (PPD) and random early discard (RED) are provided.

**Figure 1** illustrates one embodiment of a network architecture having multiple network switches. While the switches of Figure 1 are illustrated as coupled to only router/hosts and networks, any type of device that generates and/or receives data that can be carried by a wide area network can be used. The router/hosts and networks are intended to illustrate data devices and statistical multiplexing devices.

Switch 110 is coupled to router/host 100, network 102, network 104 and router/host 104. Any number of devices can be coupled to switch 110 in any manner known in the art. Similarly, router/host 122, network 124, network 126 and router/host 128 are coupled to switch 120. Any number of device can be coupled to switch 120 in any manner known in the art.

Switch 110 and 120 are coupled to switch 130. Switch 110 and 120 can also be coupled to other switch or other network devices (not shown in Figure 1). Switch 130 is also coupled to network 140, which can include any type and any number of network elements including additional switches.

Switches 110, 120 and 130 receive data from multiple devices including router/hosts, local area networks and other switches. The switches can aggregate multiple data sources into a single data stream. Statistical aggregation allows multiple sources of packet/cell data to share a link or port. For example, 24 sources, each with sustained bandwidth of 64 kbps could share a DS1 (1.544 Mbps) link. Statistical aggregation allows sources of data to burst to bandwidth higher than their sustained rate, based on availability of bandwidth capacity of the link. Similarly, STS-1 (51.840 Mbps) signals from three networks can be received and combined into an OC-3 (155.520 Mbps) signal. The OC-3 signal can be transmitted to another switch for routing and/or further aggregation.

In one embodiment, the switches of figure 1 include multiple cards that are interconnected by a switching fabric. In one embodiment, the cards have both an ingress data path and an egress data path.

The ingress data path is used to receive data from the network and transmit the data to an appropriate card within the switch. The ingress data path schedules transmission of data across the switching fabric.

The egress data path is used to receive data from the switching fabric and transmit the data across the network. The egress data path schedules transmission of data out of the switch across the network. The ingress and egress data paths interact to prevent overflow of data within the network switch.

**Figure 2** illustrates one embodiment of an interconnection of cards within a network switch. The switch of Figure 2 can be, for example, any of switches 110, 120 or 130 of Figure 1. The switch of Figure 2 is illustrated with four ingress cards and four egress cards for reasons of simplicity only. A switch can have any number of ingress cards and any number of egress cards. Also, data flow can be bi-directional. That is, the cards can also provide both egress and ingress functionality.

Each ingress card includes an ingress buffer that receives data from an external source (not shown in Figure 2). Data can be in any format, for example, IP packets or ATM cells. The ingress buffers are coupled to ingress schedulers. The ingress schedulers dispatch data to egress cards via a set of ingress ports. In one embodiment, each ingress card has a port for each egress card to which the ingress card is coupled. For example, ingress card 0 is coupled to egress card 0 through port 0, to egress card 1 through port 1, to egress card 2 through port 2, and to egress card 3 through port 3.

In one embodiment, each ingress card is coupled to each egress card, the interconnection between the ingress cards and the egress cards has  $n^2$  connections where  $n$  is the number of ingress/egress cards. Thus, the interconnection is referred to as an " $n^2$  mesh," or an " $n^2$  switching fabric." In another embodiment, the number of ingress cards is not equal to the number of egress cards, which is referred to as a " $n \times m$  mesh." The mesh is described in greater detail in U.S. Patent application number 09/746,212, entitled "A FULL MESH INTERCONNECT BACKPLANE ARCHITECTURE," filed December 22, 2000, which is assigned to the corporate assignee of the present application and incorporated by reference.

In one embodiment, traffic crosses the mesh, or switching fabric, in an asynchronous manner in that no central clock signal drives data across the mesh. Data is transmitted by the ingress cards without reference to a bus or mesh clock or frame synchronization signal. A protocol for use in communicating over the mesh is described in greater detail in U.S. Patent application number 09/745,982, entitled "A BACKPLANE PROTOCOL," filed December 22, 2000, which is assigned to the corporate assignee of the present invention and incorporated by reference.

Each egress card includes a port for each ingress card to which the ingress card is coupled. For example, egress card 0 is coupled to ingress card 0 through port 0, to ingress card 1 through port 1, to ingress card 2 through port 2, and to ingress card 3 through port 3. The ports of the egress card are coupled to an egress buffer. The egress buffer is coupled to an egress scheduler that outputs data to a device external to the egress card (not shown in Figure 2).

The architecture illustrated in Figure 2 allows scheduling duties to be distributed between ingress and egress cards. Because the scheduling duties are distributed, a centralized scheduler is not required and transmission of data between ingress cards and egress cards can be accomplished in an asynchronous manner. This allows simpler control of data switching and more efficient use of switching fabric bandwidth.

When data is received by an ingress card the data is temporarily stored in the ingress buffer on the card. The ingress scheduler extracts data from the ingress buffer and sends the data to the appropriate port. For example data to be transmitted to egress card 2 are sent to port 2. In one embodiment, the ingress scheduler reads and sends data according to an earliest deadline first scheduling scheme. In alternate embodiments, strict priority scheduling, round robin scheduling, weighted round robin scheduling, or other scheduling techniques can be used.

Data that is transferred between ingress and egress cards can be variable in size. The data can be transmitted as a group of fixed length cells or as one or more variable length packets. In one embodiment, the packets on the ingress side compete with each other on a packet basis. Each packet competes against the other packets to be selected by the ingress scheduler. In one embodiment, when one packet is selected, all of the entire packet is moved across the switch fabric. Once the ingress scheduler selects a packet of a given priority, the packet is transmitted before another packet is selected.

Data must be transferred from the ingress side of the switch to the egress side of the switch through the switching fabric. In an  $n^2$  mesh,  $n$  ingress sources can potentially contend for a single egress destination. The switch is required to transfer

the data from ingress to egress such that the contracts of the individual data flows are honored. The contracts specify bandwidth, latency, jitter, loss and burst tolerance. All contracts must be honored under all traffic contention conditions.

In one embodiment the ingress scheduler provides all cell/packet discard functionality. Cell/packet discard can include, for example, early packet discard (EPD), partial packet discard (PPD), random early discard (RED), each of which is known in the art. Additional and/or different cell/packet discard procedures can also be used.

In one embodiment, the ingress schedulers independently schedule packets and cells to the egress side. To allow this independent scheduling to function,  $n$  separate buffers are provided on each egress, one per ingress. These independent cache buffers have sufficient bandwidth to allow simultaneous egress-side arrivals from all ingress devices. In one embodiment, the egress side sends “backpressure” messages to the ingress control access to the  $n$  independent cache buffers. Data in the  $n$  buffers is transferred to a larger egress buffer, from where it is scheduled to the egress ports.

The egress buffer receives data from the ports of the egress card in a predetermined manner. For example, data can be extracted from the ports in a round robin fashion, or data can be extracted from the ports on a priority basis. Also, a combination of round robin and priority-based extraction can also be used.

Data received from the egress card ports is stored in the egress buffer. In one embodiment, the egress buffer includes a cache for each link (i.e., link between ingress card 2 and egress card 2, link between ingress card 3 and egress card 2). Each cache includes a queue for each class of data. By including a queue for each class of data, the egress buffer can provide quality of service functionality.

The egress scheduler extracts data from the egress buffer and transmits the data according to the appropriate network protocol to an external device (not shown in Figure 2). In one embodiment, the egress scheduler extracts data from the egress buffer based on priority to provide quality of service functionality. In alternate embodiments, the egress scheduler can extract data from the egress buffer using earliest deadline first scheduling.

**Figure 3** conceptually illustrates one embodiment of an ingress scheduler. In one embodiment, incoming data is categorized into one of three ingress traffic categories (ITCs). Having only three ITCs simplifies the architecture of the ingress scheduler. One embodiment of a mapping of ITCs to ATM and IP traffic is set forth in the following table. Other types of network traffic can be mapped to the three ITCs in a similar manner.

ITC		ATM	IP
Real Time (RT)		CBR, VBR-RT	IntServ Guaranteed Services, DiffServ Expedited Forwarding, DiffServ Network Control Traffic
Multicast (MC)		All ATM multicast connections	All IP multicast flows
Non Real Time (NRT)	Class 0	GFR, VBR-NRT	IntServ Controlled Load Services, DiffServ Assured Forwarding class 1
	Class 1	UBR+, ABR with MCR>0	DiffServ Assured Forwarding class 2
	Class 2	ABR with MCR=0	DiffServ Assured Forwarding class 3
	Class 3	UBR	DiffServ Assured Forwarding class 4, Best Effort

Ingress Traffic Category Mapping

In one embodiment, servicing of the three ITCs is accomplished according to the following priority: 1) RT, 2) MC, and 3) NRT, assuming no backpressure signals are active. If backpressure signals are active, the transmission of the corresponding category of data is stopped to avoid egress port buffer overflow. Lower priority data can be transmitted when the backpressure signal is active for higher priority data.

Ingress router 300 reads data from the ingress buffer (not shown in Figure 3) and sends the data to the appropriate queue based on the ITC mapping described above. Real time data is sent to one of the RT group queues (e.g., 305, 310), multicast

data is sent to MC queue 320, and non-real time data is sent to one of the NRT queues (e.g., 330, 335). In one embodiment, the ingress scheduler includes 16 RT queues; however, any number of RT queues can be provided.

In one embodiment, data is read out of the RT group queues in a round robin fashion. In another embodiment, the data is selected from the multiple RT group queues on a priority basis. Similarly, data is read out of the NRT class queues in a round robin fashion. The data is selected from the multiple NRT class queues in a weighted round robin fashion. Data from the three categories of data (RT, MC, NRT) is selected based on a priority basis to be sent to the appropriate ingress port 390.

Data flow control is described in greater detail in U.S. Patent application number 09/812,985 (Atty. Docket No. P017) filed March 19, 2001, entitled "METHOD AND SYSTEM FOR SWITCH FABRIC FLOW CONTROL," which is assigned to the corporate assignee of the present U.S. Patent application and incorporated by reference herein.

**Figure 4** conceptually illustrates one embodiment of a egress cache scheduling of egress card ports. In one embodiment, each egress card port has three associated FIFO buffers for real time data, multicast data and non-real time data, respectively.

In one embodiment, when data is received by egress port 400 the data is sent to one of three queues. The queues correspond to the ITCs. Real time data is stored in real time queue 410, multicast data is stored in multicast queue 420, and non-real time data is stored in non-real time queue 430. Data is read out of the queues in a round robin fashion. The queue from which data is transmitted is selected on a priority basis.

In the foregoing specification, the invention has been described with reference to specific embodiments thereof. It will, however, be evident that various modifications and changes can be made thereto without departing from the broader spirit and scope of the invention. The specification and drawings are, accordingly, to be regarded in an illustrative rather than a restrictive sense.

## CLAIMS

What is claimed is:

1. A network switch having an asynchronous mesh to transfer data from ingress interfaces to egress interfaces, the ingress interfaces to receive data from external sources and to selectively transmit the data across the asynchronous mesh to the egress interfaces, the egress interfaces to receive data from the asynchronous mesh and to transmit the data to external destinations.
2. The network switch of claim 1 wherein the ingress interfaces schedule respective data transmissions across the mesh and the egress interfaces schedule respective data transmissions to the external destinations.
3. The network switch of claim 2 comprising N ingress interfaces, each of the egress interfaces further comprising N independent cache buffers coupled to N respective ingress interfaces to receive data from the respective N ingress interfaces.
4. The network switch of claim 2 comprising N ingress interfaces, each of the N ingress interfaces having N independent cache buffers, each of the N independent cache buffers coupled to one of N respective egress interfaces.
5. The network switch of claim 2 wherein one or more of the N ingress interfaces segregates incoming data into queues based on one or more of: a flow identifier, a user identifier, a session identifier, a quality of service (QoS), a priority, a deadline, and a service class.

6. The network switch of claim 3 in which the egress interfaces generate a flow control signal to prevent access to one or more of the N buffers of the respective egress interfaces.

7. The network switch of claim 3 wherein the egress interfaces generate a flow control signal to prevent transmission to one or more of the N buffers of the respective egress interfaces.

8. The network switch of claim 3 wherein the N ingress interfaces transfer data to a shared egress buffer and further wherein the egress interfaces schedule and retrieve the data stored in the shared egress buffer prior to transmitting the data to the external destinations.

9. The network switch of claim 5 in which the egress interfaces generate a flow control signal to prevent access by one or more of the queues at the ingress interfaces to the egress buffer.

10. The network switch of claim 3 in which the N ingress interfaces concurrently transmit fixed-length cells and variable-length packets across the mesh to the egress interfaces.

11. A network switch comprising:  
a plurality of ingress cards, the plurality of ingress cards having an ingress buffer to temporarily store data, an ingress scheduler coupled to the ingress buffer, and a plurality of ports coupled to the ingress scheduler, the ingress scheduler to read data from the ingress buffer and to selectively transfer the data to one of the plurality of ports; and

a plurality of egress cards, the plurality of egress cards having a plurality of ports coupled to receive data from respective ingress card ports, an egress buffer coupled to the plurality of ports, the egress buffer to selectively read data from the plurality of ports and to store the data, and an egress scheduler coupled to the egress buffer, the egress scheduler to read data from the egress buffer and to transmit data from the egress card.

12. The network switch of claim 11 wherein the ingress scheduler transfers data from the ingress buffer in a first in/first out (FIFO) manner.

13. The network switch of claim 11 wherein the ingress scheduler transfers data from the ingress buffer according to priorities associated with the data.

14. The network switch of claim 11 wherein the ingress buffer receives telecommunications data.

15. The network switch of claim 11 wherein the plurality of ports of the egress cards further comprise one or more buffers to temporarily store data received from the respective ingress cards, and further wherein if a buffer of a port of an egress card is full the buffer and the port refuse data transmitted from the associated ingress card.

16. The network switch of claim 15 wherein the associated ingress card from which data was refused retransmits the refused data until the associated egress port and buffer accept the previously refused data.

17. The network switch of claim 11 wherein the egress buffers include a data store for each of the plurality of ports of the egress card.

18. The network switch of claim 17 wherein the data store for each of the plurality of ports of the egress card stores the data according to an associated class.

19. A network switch comprising:

N ingress cards coupled to receive data from external sources, the N ingress cards having a plurality of ports to transmit data, wherein each of the N ingress cards comprises an ingress scheduler coupled to the ports of the ingress card, the ingress scheduler to cause data to be selectively and asynchronously transmitted via the ports of the ingress card; and

M egress cards having ports coupled to receive data from one or more of the plurality of ports of the N ingress cards, the egress cards coupled to transmit data to external destinations, wherein each of the M egress cards comprises an egress scheduler coupled to the ports of the egress card, the egress scheduler to cause data to be selectively transmitted to the external destinations.

20. The network switch of claim 19 wherein N and M are equal.

21. The network switch of claim 19 wherein one or more of the ingress interfaces segregates incoming data into queues based on one or more of: a flow identifier, a user identifier, a session identifier, a quality of service (QoS), a priority, a deadline, and a service class.

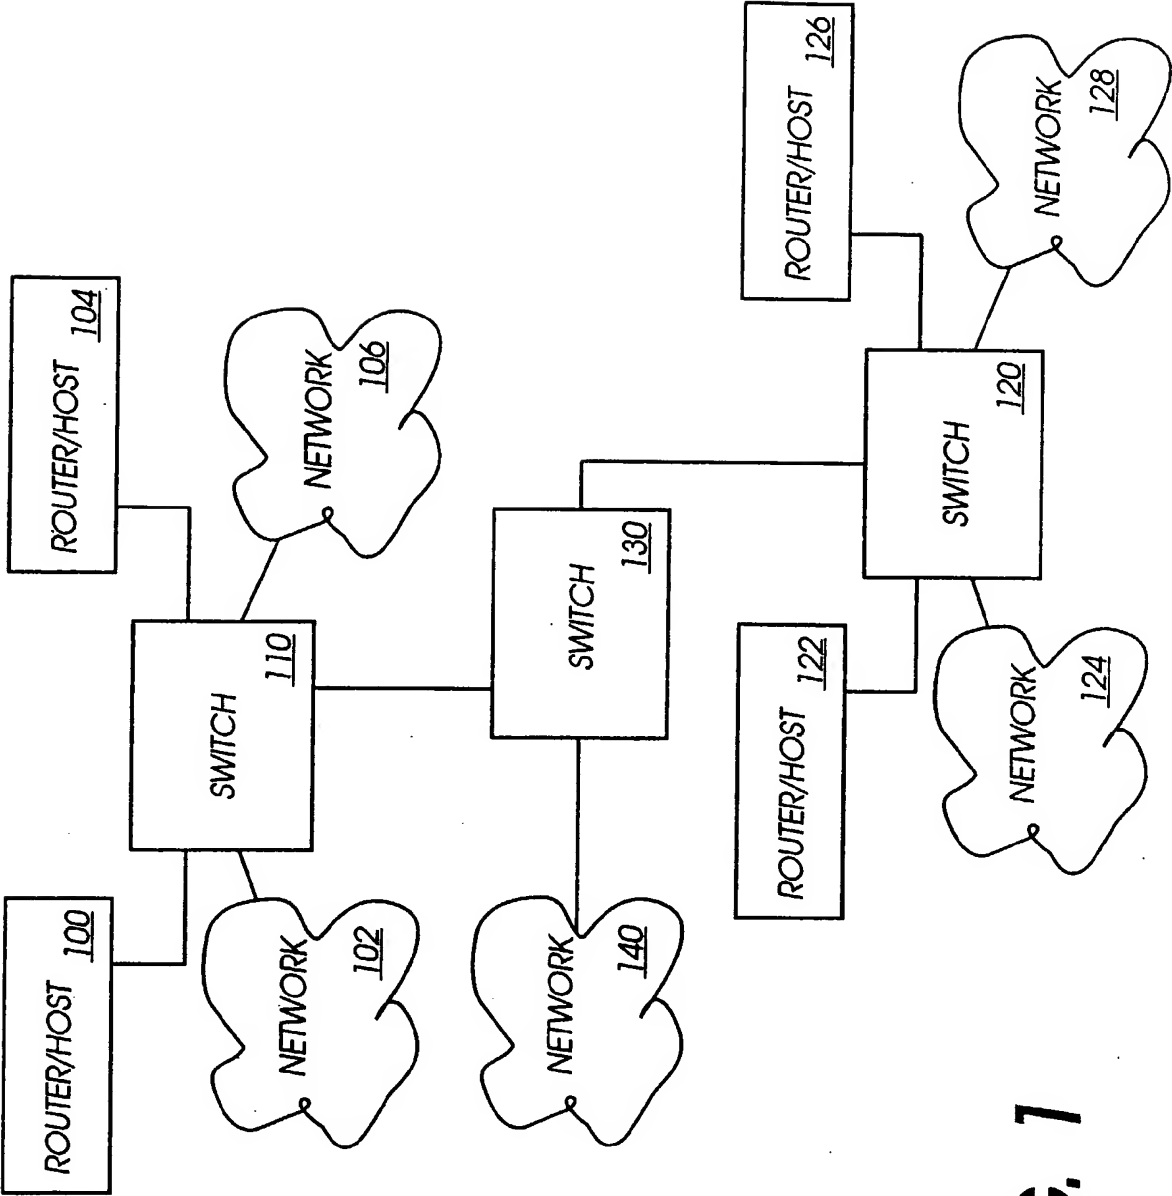
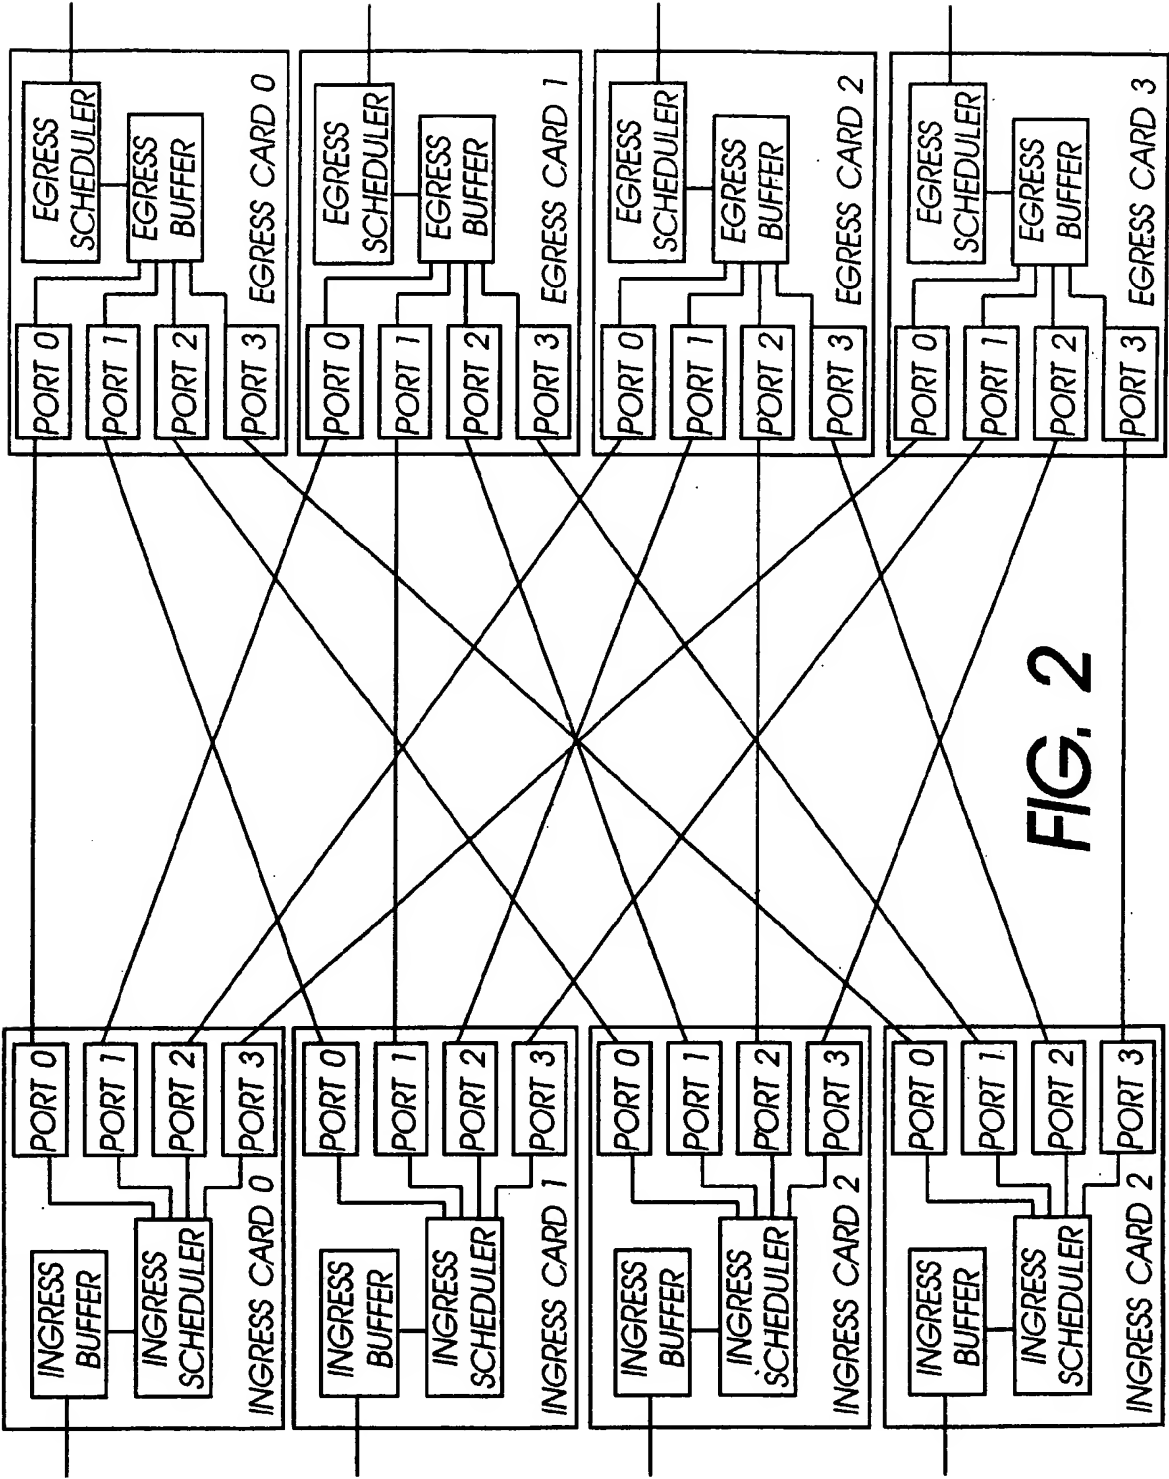


FIG. 1



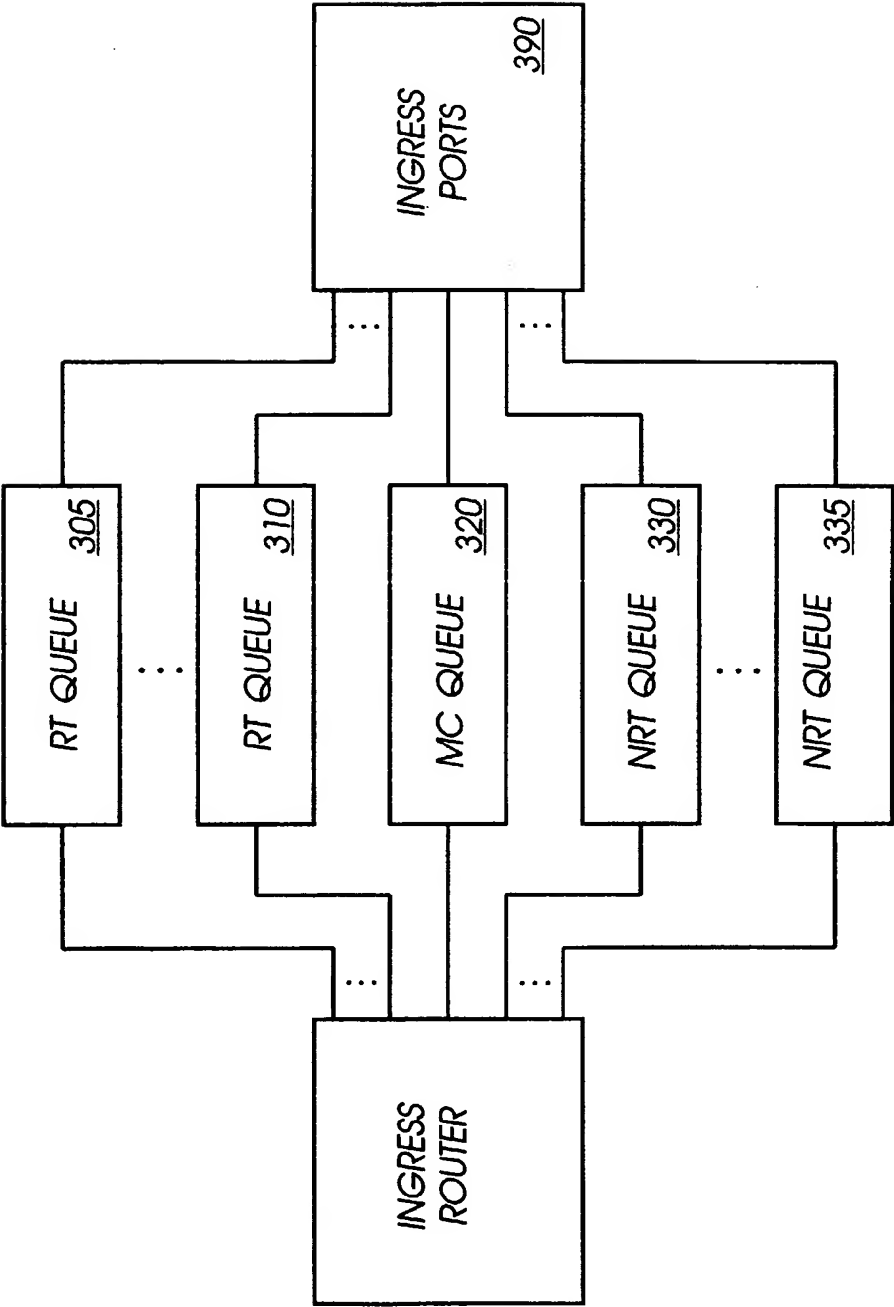


FIG. 3

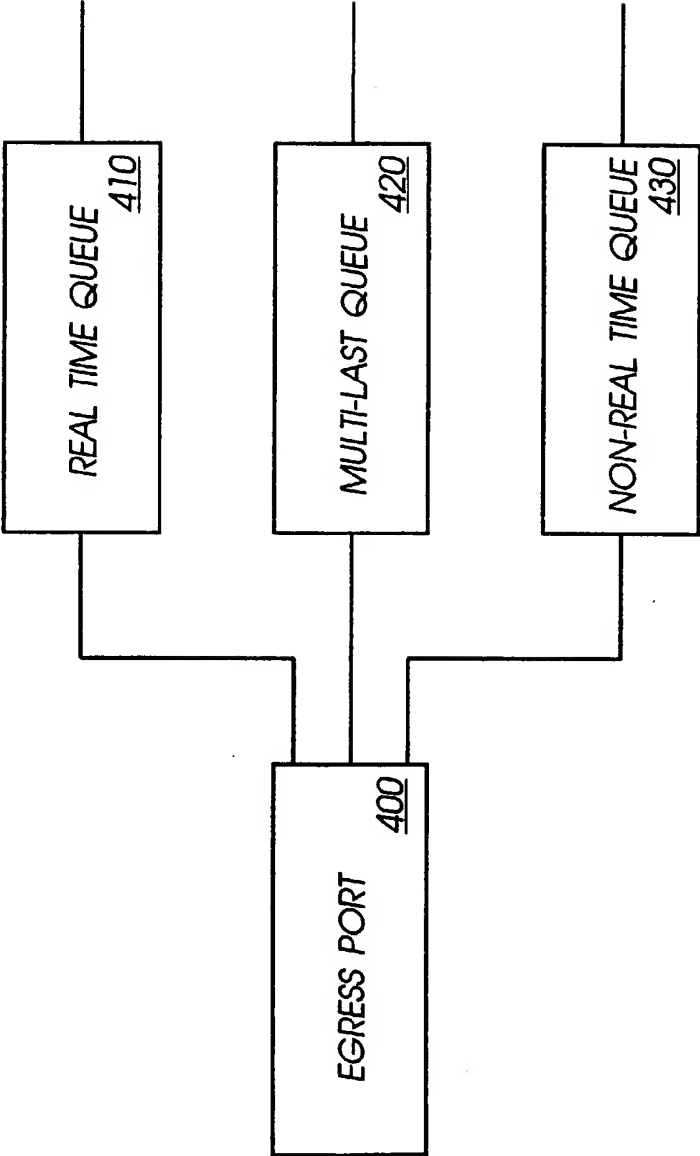


FIG. 4

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/US02/16288

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : H04L 12/28

US CL : 370/395.1, 412, 413, 415, 417, 428 and 429

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 370/395.1, 412, 413, 415, 417, 428 and 429

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 6,185,209 B1 (WICKLUND) 06 February 2001, column 1, lines 16-19, column 3, lines 1-7, column 3, lines 26-67, column 4, lines 1-7, column 7, lines 30-43.	1-5, 8, 10-11, 14-15, 16-21 ----- 6-7, 9, 12, 13, 15 and 16
Y	US 6,201,809 B1 (LEWIN et al) 13 March 2001 (13.03.2001), column 3, lines 36-47.	6-7, 9 and 15
Y	US 5,889,778 A (HUSCROFT et al) 30 March 1999 (30.03.1999), column 4, lines 40-45, column 6, lines 9-12.	12-13
Y	US 6,151,300 A (HUNT et al) 21 November 2000 (21.11.2000), column 6, lines 30-37, column 8, lines 56-65	16



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"B" earlier application or patent published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

08 July 2002 (08.07.2002)

Date of mailing of the international search report

19 AUG 2002

Name and mailing address of the ISA/US

Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No.

Authorized officer

Inder Mehra

Telephone No. 703-304-4700

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US02/16288

### Box III TEXT OF THE ABSTRACT (Continuation of Item 5 of the first sheet)

The technical features mentioned in the abstract do not include a reference sign between parentheses (PCT Rule 8.1(d)).

#### NEW ABSTRACT

The network switch (110) described herein provides a cell/packet switching architecture (Fig. 1) that switches between line interface cards across a meshed backplane. In one embodiment, the switching can be accomplished at, or near, line speed in a protocol independent manner. The protocol independent switching provides support for various applications including Asynchronous Transfer Mode (ATM) switching, Internet Protocol (IP) switching, Multiprotocol Label Switching (MPLS) switching, Ethernet switching and frame relay switching. The architecture allows the network switch (110) to provision service on a per port basis. In one embodiment, the network switch (110) provides a non-blocking topology with both input and output queuing and per flow queuing at both ingress and egress. Per flow flow-control can be provided between ingress and egress scheduling. Strict priority, round robin, weighted round robin and earliest deadline first scheduling can be provided.